

COLUMBIA T-23





SPECIFICATIONS:

	FEET	METERS
LOA.....	22'7"	6.88 m
LWL.....	20'0"	6.10 m
Beam.....	7'11"	2.41 m
Draft.....	1'11"	.58 m
Displacement—2700 lbs. Approx.....		1224.7 k
Ballast.....	810 lbs.	367.4 k
Rig.....	Sloop	
Sail Area.....	218 sq. ft.	20.25 sq. m
100% Foretriangle.....	118 sq. ft.	10.96 sq. m
Main.....	100 sq. ft.	9.29 sq. m
Fuel—(Storage space for 6 gal. O. B. Tank).....		22.7 liter
Water—(6 Gal. optional w/galley unit).....		22.7 liter
Power (Optional).....	(O. B. 9.9 h. p. Rec.)	
Maximum Cabin Headroom.....	4'3"	1.30 m
Sleeping Capacity.....	4	
Vertical Clearance.....	28'2"	8.60 m
Designer.....	Alan Payne	

STANDARD EQUIPMENT INCLUDES:

HULL—All fiberglass hand laid one piece hull w/ventral fixed keel, internal lead ballast, molded in black waterline stripe, ivory deck & hull, vinyl gunnel guard.

RIGGING—Aluminum spars, spreaders, S.S. standing rigging, hinged mast step, 2 sheet cleats, working jib sheet fairleads & track, dacron running rigging, offset backstay, main boom topping lift, main sheet traveler, 3 part dacron main street w/cam cleat, in-line upper, lower shrouds, dacron main & jib halyards, adjustable outhaul.


DECK—Non-skid walking areas, molded cockpit seat hatch & sail locker, molded main hatch, teak runners, outboard motor gudgeons & mount, vented outboard engine & fuel tank locker, bow eye, teak handrails, 3 mooring cleats, manual bilge pump, Coast Guard bilge ventilation system w/vent cowls & inspection covers, teak plywood hatch boards (2) w/hasp, varnished ash tiller, fiberglass detachable outboard rudder, cockpit scuppers (4), battery tray, molded in.

CABIN—Molded overhead liner, molded floor pan, vinyl padded hull liner, under seat storage traps, aluminum framed plexiglass windows, formica counters, teak bulkheads, anchor locker.




A DIVISION OF **Whittaker**

Columbia Yacht, 2600 Yacht Drive, Chesapeake, Va. 23320

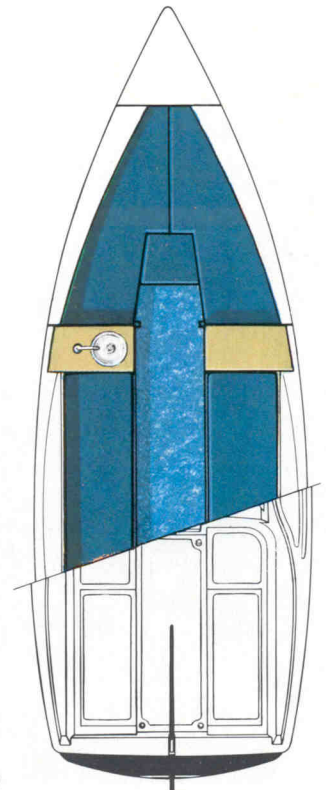

1-1-77

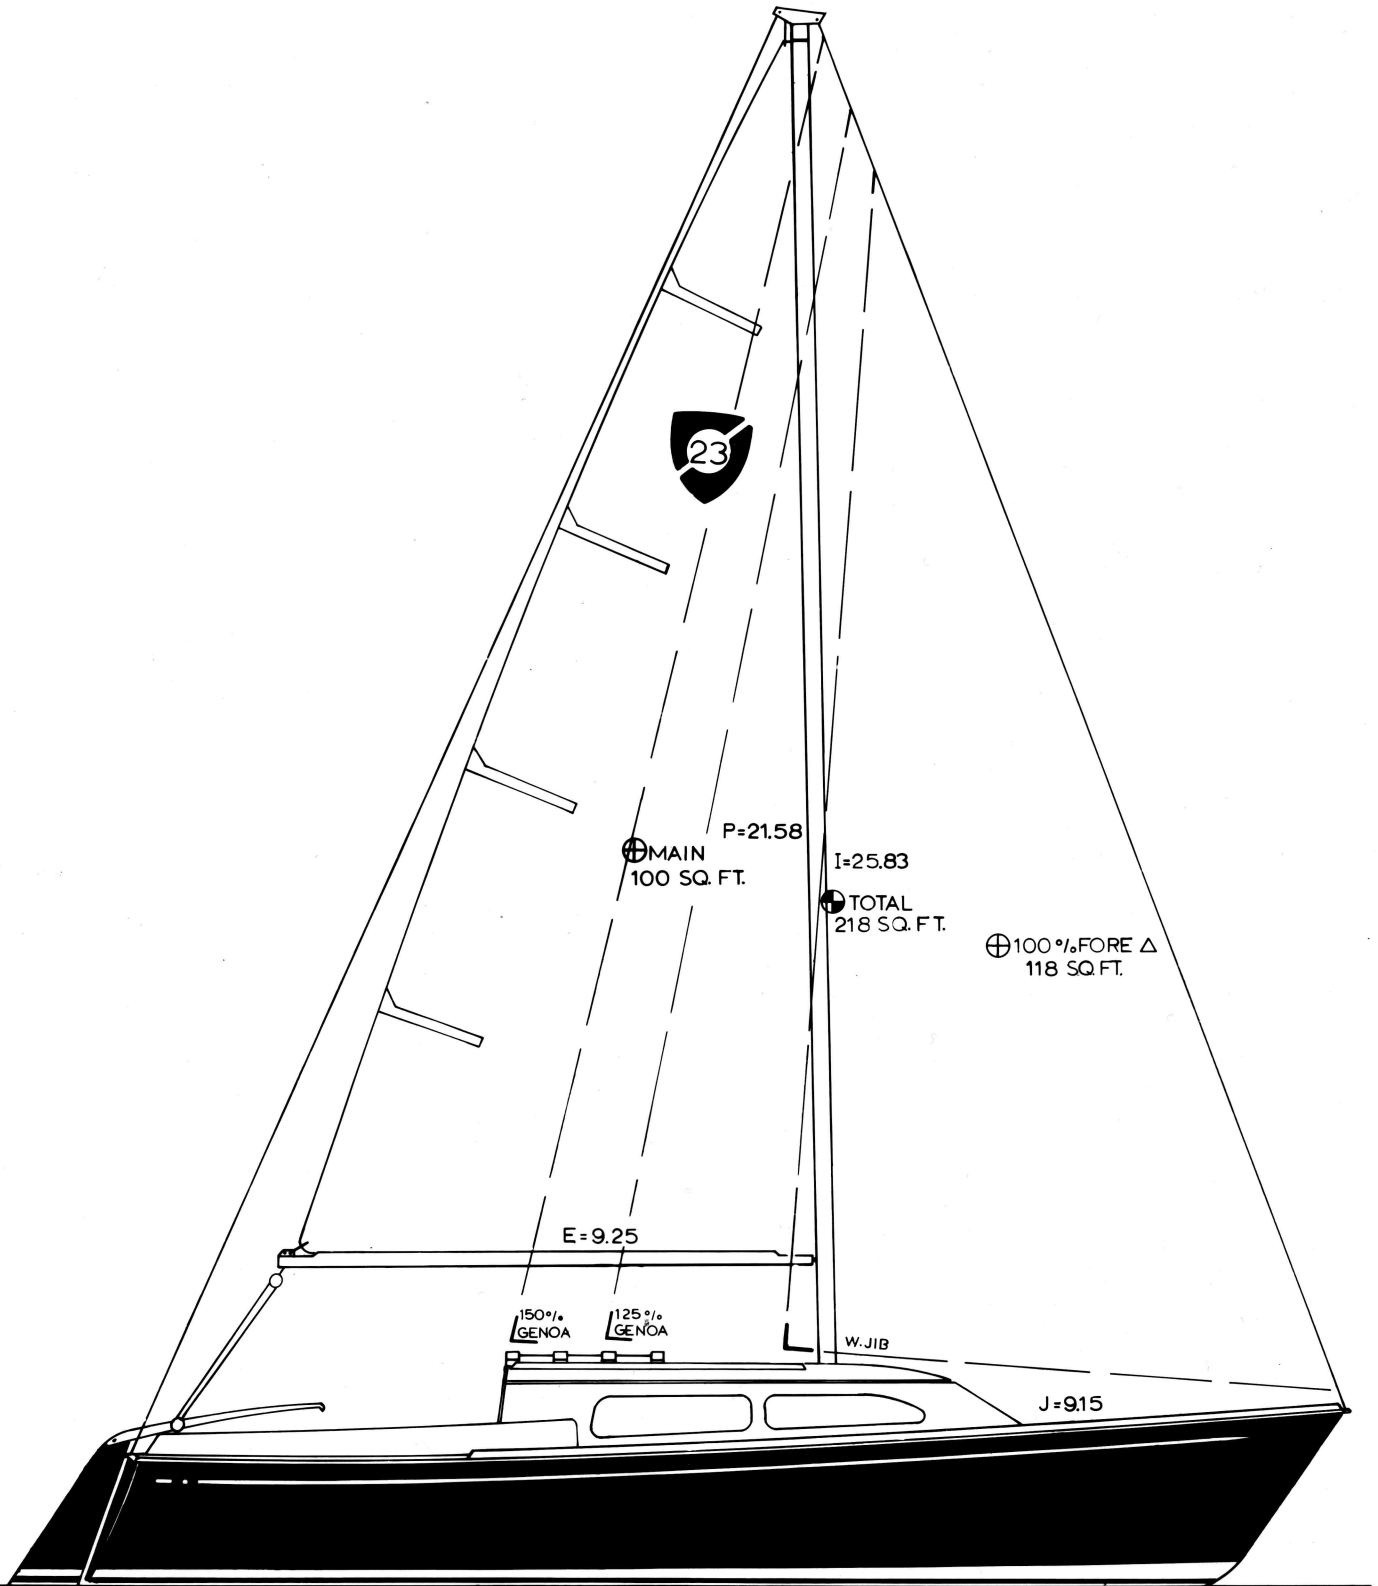

COLUMBIA 23