

# COLUMBIA T-23







**SPECIFICATIONS:**

	FEET	METERS
LOA.....	22'7"	6.88 m
LWL.....	20'0"	6.10 m
Beam.....	7'11"	2.41 m
Draft.....	1'11"	.58 m
Displacement—2700 lbs. Approx.....		1224.7 k
Ballast.....	810 lbs.	367.4 k
Rig.....	Sloop	
Sail Area.....	218 sq. ft.	20.25 sq. m
100% Foretriangle.....	118 sq. ft.	10.96 sq. m
Main.....	100 sq. ft.	9.29 sq. m
Fuel—(Storage space for 6 gal. O. B. Tank).....		22.7 liter
Water—(6 Gal. optional w/galley unit).....		22.7 liter
Power (Optional).....	(O. B. 9.9 h. p. Rec.)	
Maximum Cabin Headroom.....	4'3"	1.30 m
Sleeping Capacity.....	4	
Vertical Clearance.....	28'2"	8.60 m
Designer.....	Alan Payne	

**STANDARD EQUIPMENT INCLUDES:**

**HULL**—All fiberglass hand laid one piece hull w/ventral fixed keel, internal lead ballast, molded in black waterline stripe, ivory deck & hull, vinyl gunnel guard.

**RIGGING**—Aluminum spars, spreaders, S.S. standing rigging, hinged mast step, 2 sheet cleats, working jib sheet fairleads & track, dacron running rigging, offset backstay, main boom topping lift, main sheet traveler, 3 part dacron main street w/cam cleat, in-line upper, lower shrouds, dacron main & jib halyards, adjustable outhaul.


**DECK**—Non-skid walking areas, molded cockpit seat hatch & sail locker, molded main hatch, teak runners, outboard motor gudgeons & mount, vented outboard engine & fuel tank locker, bow eye, teak handrails, 3 mooring cleats, manual bilge pump, Coast Guard bilge ventilation system w/vent cowls & inspection covers, teak plywood hatch boards (2) w/hasp, varnished ash tiller, fiberglass detachable outboard rudder, cockpit scuppers (4), battery tray, molded in.

**CABIN**—Molded overhead liner, molded floor pan, vinyl padded hull liner, under seat storage traps, aluminum framed plexiglass windows, formica counters, teak bulkheads, anchor locker.



A DIVISION OF **Whittaker**

Columbia Yacht, 2600 Yacht Drive, Chesapeake, Va. 23320

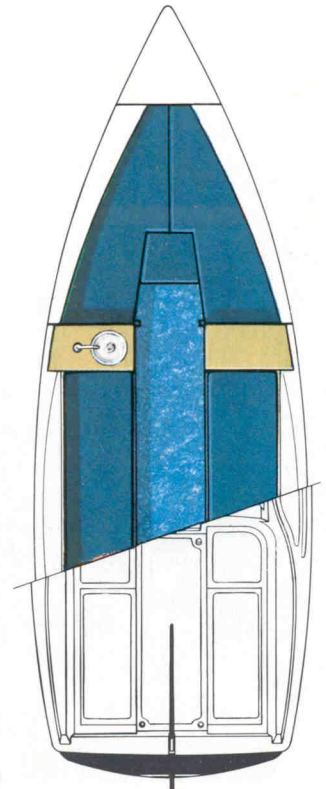

1-1-77

